


SB-STRAIGHT BOOTS

Model		A	B	C	D	E	F	G	H
		Frame-W	Frame-H	Overall-HT	Btm-Collar	Depth-Neck	Register-Opening		Duct Dia.
SBH-2126	SB	14.5	7.5	8.5					
SBH-484	SB	13	9.25	8.5	N/A	N/A	4.25	8.25	4"
SBH-485	SB	13	9.25	8.5	N/A	N/A	4.25	8.25	4"
SBH-4105	SB	13	9.25	8.5	N/A	N/A	4.25	10.25	5"
SBH-4106	SB	13	9.25	8.5	N/A	N/A	4.25	10.25	6"
SBH-4107	SB	13	9.25	8.5	N/A	N/A	4.25	10.25	7"
SBH-4126	SB	15	9.25	9	N/A	N/A	4.25	12.25	6"
SBH-4127	SB	15	9.25	9	N/A	N/A	4.25	12.25	7"
SBH-4128	SB	15	9.25	9	N/A	N/A	4.25	12.25	8"
SBH-4146	SB	17	9.25	9	N/A	N/A	4.25	14.25	6"
SBH-4147	SB	17	9.25	9	N/A	N/A	4.25	14.25	7"
SBH-4148	SB	17	9.25	9	N/A	N/A	4.25	14.25	8"
SBH-6106	SB	13	11.25	8.5	N/A	N/A	6.25	10.25	6"
SBH-6107	SB	13	11.25	8.5	N/A	N/A	6.25	10.25	7"
SBH-6108	SB	13	11.25	8.5	N/A	N/A	6.25	10.25	8"
SBH-6126	SB	15	11.25	9	N/A	N/A	6.25	12.25	6"
SBH-6127	SB	15	11.25	9	N/A	N/A	6.25	12.25	7"
SBH-6128	SB	15	11.25	9	N/A	N/A	6.25	12.25	8"
SBH-6146	SB	17	11.25	9.5	N/A	N/A	6.25	14.25	6"
SBH-6147	SB	17	11.25	9.5	N/A	N/A	6.25	14.25	7"
SBH-6148	SB	17	11.25	9.5	N/A	N/A	6.25	14.25	8"
SBH-8106	SB	13	13	8.5	N/A	N/A	8.25	10.25	6"
SBH-8107	SB	13	13	8.5	N/A	N/A	8.25	10.25	7"
SBH-8108	SB	13	13	8.5	N/A	N/A	8.25	10.25	8"
SBH-8109	SB	13	13	8.5	N/A	N/A	8.25	10.25	9"
SBH-8146	SB	17	13	9.5	N/A	N/A	8.25	14.25	6"
SBH-8147	SB	17	13	9.5	N/A	N/A	8.25	14.25	7"
SBH-8148	SB	17	13	9.5	N/A	N/A	8.25	14.25	8"
SBH-8149	SB	17	13	9.5	N/A	N/A	8.25	14.25	9"

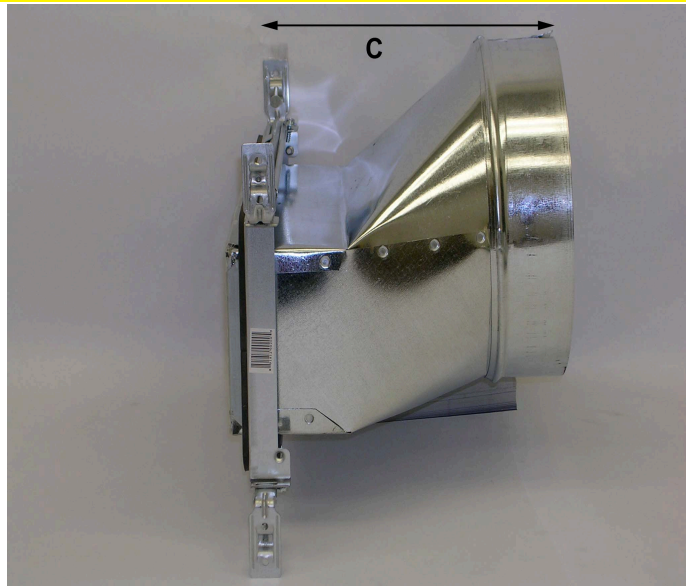

Notes

- *Rubber Gasket flange is 3/4" in width on all four sides of the Speedi-Boot frame.
- *When positioning the Speedi-Boot, the Register Opening will be a minimum of 3/4" from any Joist - Truss or Stud.
- *If required the extended tabs cut outs for arm repositioning may be bent over or cut to position the Speedi-Boot frame closer to the Joist - Truss or Stud.