
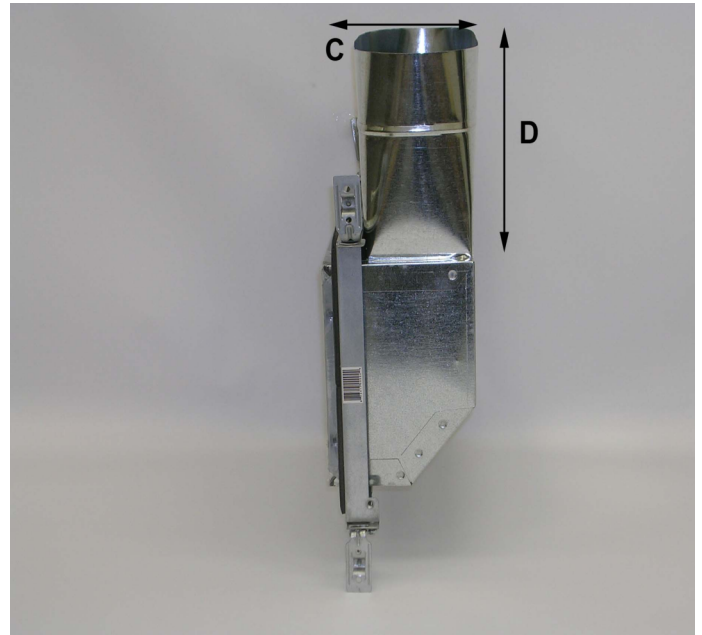


WS-WALL STACKS

Model		A	B	C	D	E	F
		Frame-W	Frame-H	Depth	HT-Collar	Register-Opening	
SBH-4126	WS	15	9.25	3.25	6	4.25	12.25
SBH-4127	WS	15	9.25	3.25	6	4.25	12.25
SBH-6106	WS	13	11.25	3.25	6	6.25	10.25
SBH-6107	WS	13	11.25	3.25	6	6.25	10.25
SBH-6126	WS	15	11.25	3.25	6	6.25	12.25
SBH-6127	WS	15	11.25	3.25	6	6.25	12.25

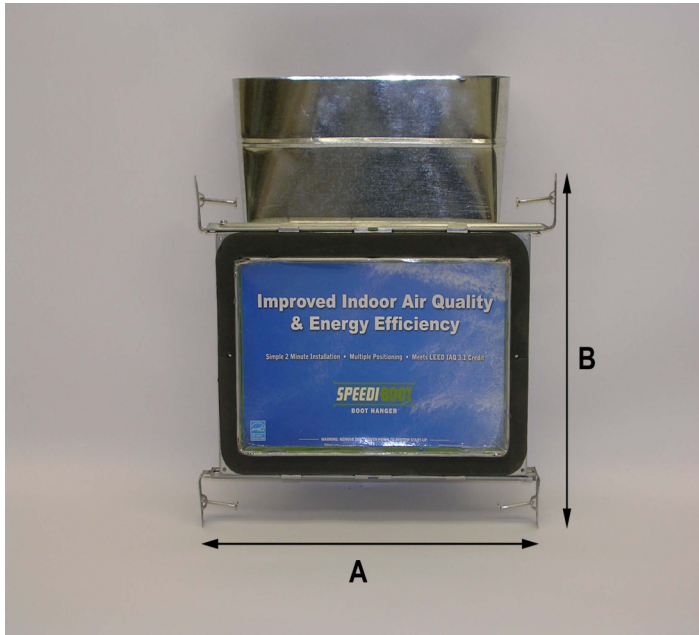

Notes

- *Rubber Gasket flange is 3/4" in width on all four sides of the Speedi-Boot frame.
- *When positioning the Speedi-Boot, the Register Opening will be a minimum of 3/4" from any Joist - Truss or Stud.
- *If required the extended tabs cut outs for arm repositioning may be bent over or cut to position the Speedi-Boot frame closer to the Joist - Truss or Stud.